

TECHNICAL SPECIFICATION


TRIDON

611 SERIES

HOUSING
201/301 ST STL
TRIDON USA

SCREW
CAR CL CHR
5/16 HEX HD


BAND
201/301 ST STL

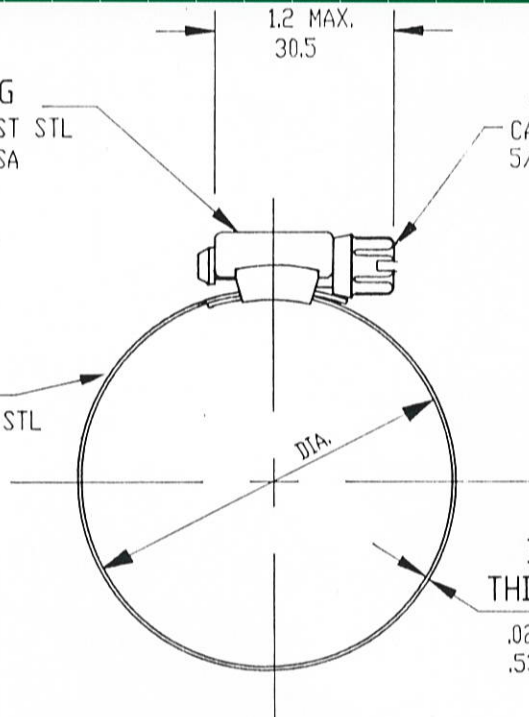

BAND
THICKNESS
.021/.026
.53/.66

CLAMP SIZE	MAX DIA.		MIN DIA.	
	INCH	MM.	INCH	MM.
006	7/8	22.2	3/8	9.5
008	1	25.4	7/16	11.1
010	1-1/16	27.0	9/16	14.3
012	1-1/4	31.7	9/16	14.3
013	1-5/16	33.3	9/16	14.3
016	1-1/2	38.1	11/16	17.5
020	1-3/4	44.4	3/4	19.0
024	2	50.8	1-1/16	27.0
028	2-1/4	57.1	1-5/16	33.3
030	2-5/16	58.7	1-5/16	33.3
032	2-1/2	63.5	1-9/16	39.7
036	2-3/4	69.8	1-13/16	46
040	3	76.2	2-1/16	52.4
044	3-1/4	82.5	2-5/16	58.7
048	3-1/2	88.9	2-9/16	65.1
052	3-3/4	95.2	2-13/16	71.4
056	4	101.6	3-1/16	77.8
060	4-1/4	107.9	3-5/16	84.1
064	4-1/2	114.3	2-1/2	63.5
072	5	127	3	76.2
080	5-1/2	139.7	3-1/2	88.9
084	5-3/4	146.0	3-3/4	95.3
088	6	152.4	4	101.6
096	6-1/2	165.1	4-1/2	114.3
104	7	177.8	5	127

CLAMP SIZE	MAX DIA.		MIN DIA.	
	INCH	MM.	INCH	MM.
116	7-3/4	196.85	5-3/4	146.05
120	8	203.2	6	152.4
128	8-1/2	215.9	6-1/2	165.1
136	9	228.6	7	177.8
140	9-1/4	234.9	7-1/4	184.2
152	10	254.0	8	203.2
164	10-3/4	273.0	8-3/4	222.2
172	11-1/4	285.7	9-1/4	235.0
180	11-3/4	298.4	9-3/4	247.6
188	12-1/4	311.2	10-1/4	265.1
200	13	330.2	11	279.4
212	13-3/4	349.2	11-3/4	298.4
224	14-1/2	368.2	12-1/2	317.5
236	15-1/4	387.3	13-1/4	336.6
248	16	406.4	14	354.3
270	17-3/8	441.3	15-3/8	390.5
312	20	508.0	18	457.2
332	21-1/4	539.8	19-1/8	485.8
390	24-7/8	631.8	22-7/8	581.0

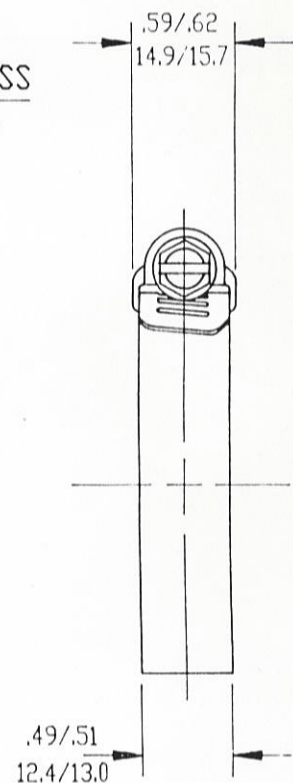

NOTES:

1. CURLED & ENGAGED THRU SIZE 104 ONLY
2. FREE TORQUE = 4 IN-LBS MAX.
3. ULTIMATE TORQUE = 60 IN-LBS MIN.

ENVELOPE DWG = HS-TA