


TECHNICAL SPECIFICATION

TRIDON

325 SERIES

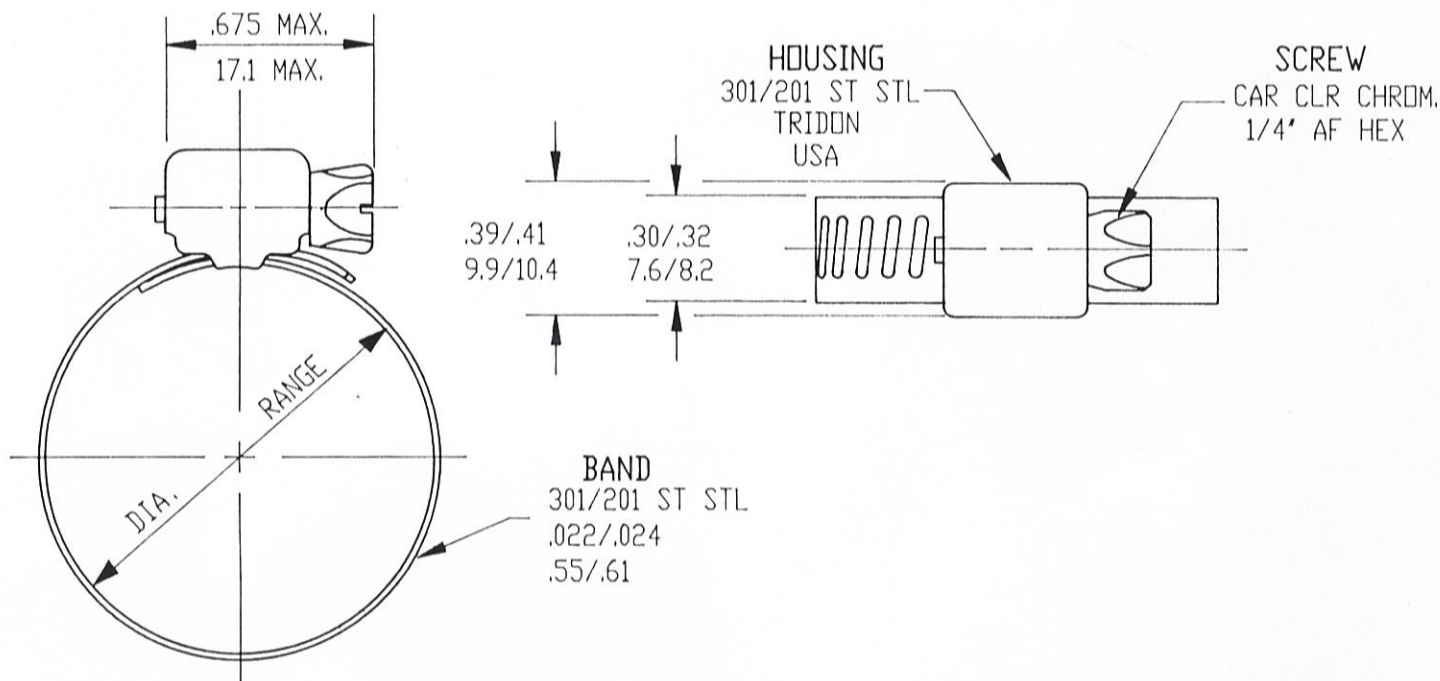

CLAMP SIZE	MIN DIAMETER		MAX DIAMETER		MIN. SHIPPING DIA.	
	INCH	MM	INCH	MM	INCH	MM
003	7/32	5.6	9/16	14	0.470	11.9
004	7/32	5.6	5/8	15.9	0.540	13.7
005	7/16	11.1	11/16	17.5	0.680	17.3
006	5/16	7.9	7/8	22.2	0.800	20.3
008	7/16	11.1	1	25.4	0.920	23.4
010	1/2	12.7	1-1/16	27.0	1.00	25.4
012	9/16	14.3	1-1/4	31.8	1.19	30.2
016	11/16	17.5	1-1/2	38.1	1.44	36.6
020	7/8	22.2	1-3/4	44.5	1.69	42.9
024	1-5/16	33.3	2	50.8	1.93	49.0
028	1-9/16	39.7	2-1/4	57.2	2.19	55.6
032	1-13/16	46.0	2-1/2	63.5	2.44	62.0
036	2-1/16	52.4	2-3/4	69.9	2.69	68.3

NOTES:

1. FREE TORQUE = 4 IN-LBS MAX.
2. ULTIMATE TORQUE = 20 IN-LBS MIN.

ENVELOPE DWG = E2325